

KORAM NUBUK

Composizione Composition	PU	47%	±2
	CO	38%	±2
	PL	15%	±2

Caratteristiche Features		Unità di misura Unit of measurement		Valore Values	Metodo Method	basato Norma Reference standard
	Peso Weight	[g/m ²]		400 ± 10%	ALLIO05_02_32	UNI EN ISO 2286-2
	Spessore Thickness	[mm]		1 ± 0,1	ALLIO05_02_33	UNI EN ISO 2286-3
	Trazione Tensile	O/Warp T/Weft	[N]	≥ 400 ≥ 400	ALLIO05_02_26	UNI EN ISO 1421
	Allungamento a Rottura Elongation at Break	O/Warp T/Weft	[%]	≥ 15 ≥ 15	ALLIO05_02_26	UNI EN ISO 1421
	Delaminazione Delamination	O/Warp T/Weft	[N/5cm]	≥ 35 ≥ 35	ALLIO05_02_25	UNI EN ISO 2411
	Lacerazione Tear	O/Warp T/Weft	[N]	≥ 15 ≥ 20	ALLIO05_02_27	UNI EN ISO 4674/1
	Flessioni Flexion	O/Warp T/Weft	[n°] [n°]	≥ 150.000 ≥ 150.000	ALLIO05_02_05	UNI 4818/13
	Abrasionone Martindale Martindale Abrasion	Secco/Dry Umido/Wet	[n°] [n°]	≥ 5.000 ND	ALLIO05_02_04	UNI EN ISO 12947-4
	Solidità alla luce Light fastness	Scala dei blu Blue scale		ND	ALLIO05_02_14	UNI EN ISO 105-B02
	Spray Test Water Repellency			80	ALLIO05_02_37	UNI 5120
	Jungle Test	4 settimane 4 weeks		ND	ALLIO05_02_11	UNI EN 12280/3
	Altezza rotolo Roll width	[cm]		137 – 140		
	Lunghezza rotolo Roll length	[m]		35	PG13	


Note Notes	NA = Non Applicabile / Not Applicable – ND = Non Disponibile / Unavailable
	Pulire l'articolo utilizzando un panno inumidito con acqua e sapone neutro e strofinare delicatamente la superficie. Non utilizzare prodotti a base alcolica, sgrassatori domestici o pulitori aggressivi. Gently clean the product surface using a cloth dampened with water and mild soap. Don't use alcohol-based products, domestic degreaser or harsh cleaners.
	La disomogeneità di colore tra lotti è frutto della particolare lavorazione si consiglia di non utilizzare lotti diversi per la stessa produzione. Colour inhomogeneity from one batch to another is due to special processing. We recommend not using different batches for the same production. Fiscatech S.p.a. non è responsabile dei difetti causati dalla migrazione di coloranti provenienti da materiale di terzi. Fiscatech S.p.a. is not responsible for any blemish caused by the migration of colours from other materials

koram NUBUK

KORAM NUBUK has a soft and velvety surface similar to suede but with a more sophisticated velour. This material is soft, warm, natural and breathable. It's available in a variety of colours, from the most classic to the more contemporary ones, based on the latest fashion trends.

KORAM NUBUK is used to produce leather goods, as well as technical and leisure footwear.

KORAM NUBUK doesn't fear the harshest conditions. It's perfect for making hiking shoes, as it's treated with PFOA- and FFOS-free water-repellent finishes combined with an antibacterial agent.

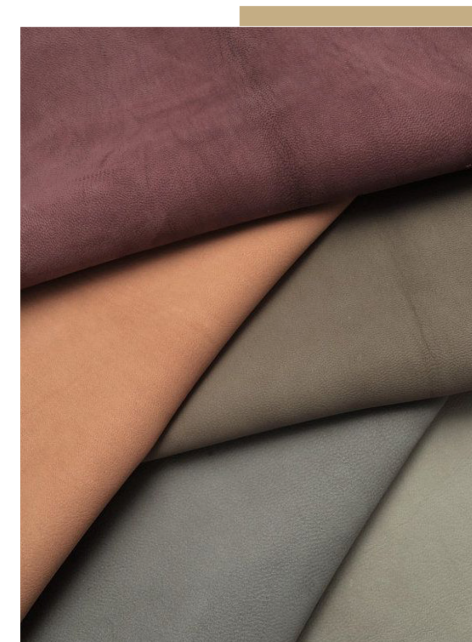

KORAM NUBUK is treated with Ultra Fresh additive to protect against mould and bad odours resulting from bacteria.